


26 671 243 1 TEMPESTA SYSTEM 250 SHOWER SYSTEM WITH THERMOSTAT FOR WALL MOUNTING

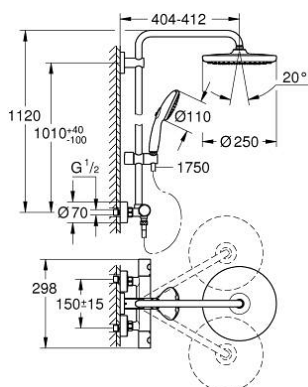

PRODUCT DESCRIPTION (1/2)

- Colour: matte black
- Consisting of:
 - horizontal swivable 390 mm projection shower arm
 - upper bracket adjustable for minimal adaption to existing drilling holes
 - exposed thermostatic shower with Aquadimmer function
- allows change between:
 - head shower Tempesta 250
- spray pattern:
 - Rain
 - head shower with black rear cover
 - with ball joint
 - rotation angle $\pm 10^\circ$
- hand shower Tempesta 110 (26 161)
- 2 spray patterns:
 - Rain, Jet
- adjustable height via gliding element
- shower hose 1750 mm 1/2" x 1/2" (28 388)
- maximum flow rate (at 3 bar): 8.5 l/min
- GROHE Water Saving - Less water, perfect flow
- GROHE TurboStat compact cartridge with wax thermoelement
- GROHE SafeStop safety button at 38°C (calibration required)
- GROHE SafeStop Plus optional temperature limiter at 50°C included
- GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option
- GROHE DreamSpray perfect spray pattern
- ShockProof silicone ring prevents damage caused by a shower falling
- GROHE Long-Life finish
- GROHE MetalGrip ergonomically shaped metal handles
- SpeedClean anti-limescale system
- Inner WaterGuide for a longer life
- TwistStop preventing the hose from twisting
- suitable for instantaneous heaters from 18 kW/h
- minimum flow rate 7 l/min.

Pure Freude
an Wasser



26 671 243 1 TEMPESTA SYSTEM 250 SHOWER SYSTEM WITH THERMOSTAT FOR WALL MOUNTING

PRODUCT DESCRIPTION (2/2)

- optional upgrade: GROHE EasyReach tray (26 362)
- professional edition