
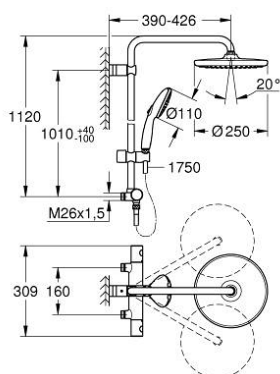


## 26 818 243 1 TEMPESTA SYSTEM 250 SHOWER SYSTEM WITH THERMOSTAT 160 CC FOR WALL MOUNTING

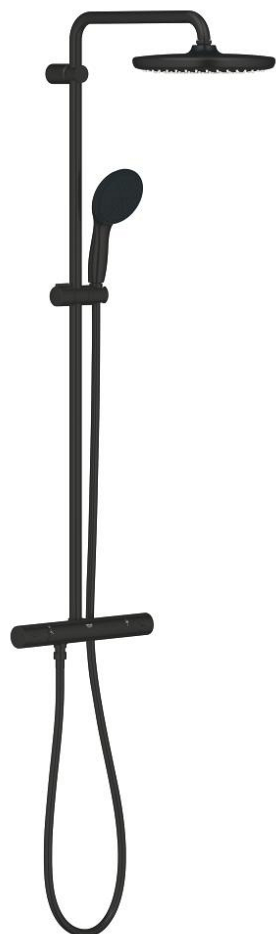

### PRODUCT DESCRIPTION (1/2)

- Colour: matte black
- Consisting of:
  - exposed thermostatic shower with Aquadimmer function
  - centre distance 160 mm
  - allows change between:
    - head shower Tempesta 250 (26 666)
    - spray pattern:
      - Rain
      - head shower with white rear cover
      - with ball joint
      - rotation angle  $\pm 10^\circ$
    - hand shower Tempesta 110 (27 597)
    - 2 spray patterns:
      - Rain, Jet
    - adjustable height via gliding element
  - RotaFlex TwistStop shower hose 1750 mm 1/2" x 1/2" (28 410)
  - maximum flow rate (at 3 bar): 8.5 l/min
  - GROHE Water Saving - Less water, perfect flow
  - GROHE TurboStat compact cartridge with wax thermoelement
  - GROHE SafeStop safety button at 38°C (calibration required)
  - GROHE SafeStop Plus optional temperature limiter at 43°C included
  - GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option
  - GROHE DreamSpray perfect spray pattern
  - GROHE FastFixation upper bracket, +40 / -100 mm height adjustable and up to 36 mm depth adjustable
  - ShockProof silicone ring prevents damage caused by a shower falling
  - GROHE Long-Life finish
  - SpeedClean anti-limescale system
  - Inner WaterGuide for a longer life
  - TwistStop preventing the hose from twisting
  - suitable for instantaneous heaters from 18 kW/h
  - minimum flow rate 7 l/min.

Pure Freude  
an Wasser



## 26 818 243 1 **TEMPESTA SYSTEM 250 SHOWER SYSTEM WITH THERMOSTAT 160 CC FOR WALL MOUNTING**

### **PRODUCT DESCRIPTION** (2/2)

- integrated flow elements for improved performance with higher pressure differences between hot and cold water supply
- professional edition
- horizontal swivable 390 mm projection shower arm