
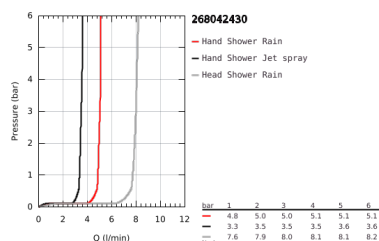


26 804 243 0 VITALIO START SYSTEM 210 SHOWER SYSTEM WITH THERMOSTAT FOR WALL MOUNTING

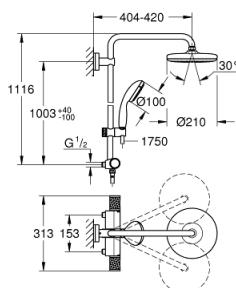

PRODUCT DESCRIPTION (1/2)

- Colour: matte black
- Consisting of:
 - horizontal swivable 390 mm projection shower arm
 - exposed thermostatic shower with Aquadimmer function
 - allows change between:
 - head shower Vitalio Start 210 (26 415)
 - Rain spray pattern
 - GROHE Water Saving 9.5 l/min flow limiter
 - with ball joint
 - rotation angle $\pm 15^\circ$
 - hand shower Vitalio Start 100 2 sprays, 5.7 l/min (27 946)
 - 2 spray patterns:
 - Rain, Jet
 - GROHE Water Saving 5.7 l/min. flow limiter
 - adjustable height via gliding element
 - shower hose VitalioFlex Comfort 1750 mm 1/2" x 1/2" (28 745)
 - GROHE TurboStat compact cartridge with wax thermoelement
 - GROHE SafeStop safety button at 38°C (calibration required)
 - GROHE SafeStop Plus optional temperature limiter at 43°C included
 - GROHE CoolTouch prevents scalding on hot surfaces
 - GROHE ProGrip with knurl structure
 - GROHE DreamSpray perfect spray pattern
 - GROHE Water Saving - Less water, perfect flow
 - GROHE Long-Life finish
 - GROHE FastFixation upper bracket adjustable
 - ShockProof silicone ring prevents damage caused by a shower falling
 - SpeedClean anti-limescale system
 - Inner WaterGuide for a longer life
 - TwistStop preventing the hose from twisting
 - suitable for instantaneous heaters from 18 kW/h
 - minimum flow rate 7 l/min.
 - centre distance 153 mm
 - without straight unions

Pure Freude
an Wasser



26 804 243 0 **VITALIO START SYSTEM 210 SHOWER SYSTEM WITH THERMOSTAT FOR WALL MOUNTING**

PRODUCT DESCRIPTION (2/2)

- with 8 mm compensation disc for upper bracket
- Consumer edition