


26 980 243 1 TEMPESTA SYSTEM 250 FLEX SHOWER SYSTEM WITH DIVERTER FOR WALL MOUNTING

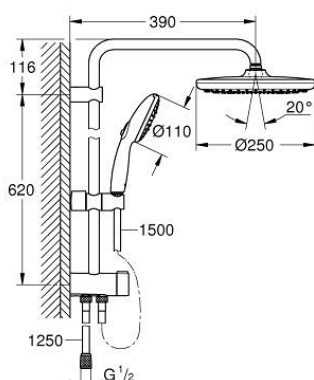

PRODUCT DESCRIPTION (1/2)

- Colour: matte black
- Consisting of:
 - horizontal 390 mm shower arm, adjustable before installation
 - change by diverter between hand shower, head shower or head shower
- Eco setting
- head shower Tempesta 250
- 2 spray patterns (via diverter):
 - Rain, SmartRain
- head shower with black rear cover
- with ball joint
- rotation angle $\pm 10^\circ$
- hand shower Tempesta 110
- 3 spray patterns:
 - Rain, Jet, Massage
- adjustable height via gliding element
- distance between diverter and upper bracket: 620 mm
- shower hose Relexaflex 1500 mm 1/2" x 1/2"
- shower hose Relexaflex 1250 mm 1/2 x 1/2"
- flexible installation: connection to tap / wall union for water supply with 1/2" thread of the 1250 mm shower hose
- maximum flow rate (at 3 bar): 7.9 l/min
- GROHE Water Saving - Less water, perfect flow
- GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option
- GROHE DreamSpray perfect spray pattern
- ShockProof silicone ring prevents damage caused by a shower falling
- GROHE Long-Life finish
- SpeedClean anti-limescale system
- Inner WaterGuide for a longer life

Pure Freude
an Wasser



26 980 243 1 TEMPESTA SYSTEM 250 FLEX SHOWER SYSTEM WITH DIVERTER FOR WALL MOUNTING

PRODUCT DESCRIPTION (2/2)

- suitable for instantaneous heaters from 18 kW/h
- minimum flow rate 7 l/min.
- min. recommended pressure 0.2 bar
- professional edition