
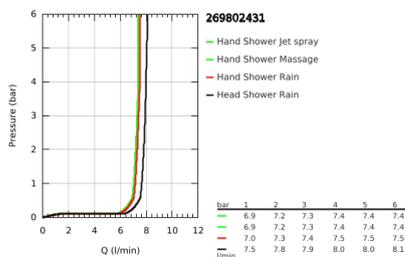


26 980 243 1 TEMPESTA SYSTEM 250 FLEX SHOWER SYSTEM WITH DIVERTER FOR WALL MOUNTING



PRODUCT DESCRIPTION (1/2)

- Colour: matte black
- Consisting of:
 - horizontal 390 mm shower arm, adjustable before installation
 - change by diverter between hand shower, head shower or head shower Eco setting
 - head shower Tempesta 250
 - 2 spray patterns (via diverter):
 - Rain, SmartRain
 - head shower with black rear cover
 - with ball joint
 - rotation angle $\pm 10^\circ$
 - hand shower Tempesta 110
 - 3 spray patterns:
 - Rain, Jet, Massage
 - adjustable height via gliding element
 - distance between diverter and upper bracket: 620 mm
 - shower hose Relexaflex 1500 mm 1/2" x 1/2"
 - shower hose Relexaflex 1250 mm 1/2 x 1/2"
- flexible installation: connection to tap / wall union for water supply with 1/2" thread of the 1250 mm shower hose
- maximum flow rate (at 3 bar): 7.9 l/min
- GROHE Water Saving - Less water, perfect flow
- GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option
- GROHE DreamSpray perfect spray pattern
- ShockProof silicone ring prevents damage caused by a shower falling
- SpeedClean anti-limescale system
- Inner WaterGuide for a longer life
- suitable for instantaneous heaters from 18 kW/h

Pure Freude
an Wasser



26 980 243 1 TEMPESTA SYSTEM 250 FLEX SHOWER SYSTEM WITH DIVERTER FOR WALL MOUNTING

PRODUCT DESCRIPTION (2/2)

- minimum flow rate 5 l/min.
- min. recommended pressure 1.0 bar
- professional edition