


## 39 058 000 **RAPID SL 4 IN 1 SET FOR WC**

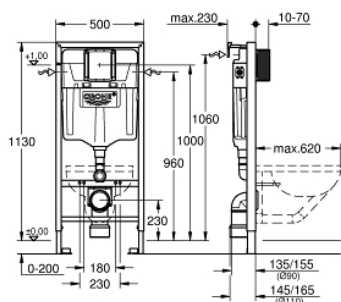

### PRODUCT DESCRIPTION (1/2)

- with flushing cistern GD 2, 6 l - 9 l
- 1.13 m finished installation height
- for on-the-wall installations or studed walls
- powder coated steel frame, self-supporting
- for dry-cladding, completely pre-assembled
- with fixed connections
- quick adjustment, lockable
- fixing material
- TÜV approved
- 2 WC fixing bolts
- fixing device for ceramic
- WC ceramics with small bearing area (< 205 mm) require additional accessory 38 779 000
- distance of fixing bolts 180/230 mm
- outlet bend Ø 90 mm
- depth adjustable
- reducer Ø 90/110 mm
- inlet and outlet connecting set
- flushing cistern GD 2, 6 - 3 l
- factory set 6 l and 3 l
- pneumatic discharge valve offering 2 modes of operation: dual flush or single flush
- water supply from left/right or back
- low noise (group I acc. to German Noise Specification)
- Insulated against condensation
- ½" water supply connection including integrated angle valve and push fit flexible hose union
- no tools required for the installation of the inspection shaft incl. protection during construction phase
- inspection shaft for vertical or horizontal use allows for flush plate to be installed vertically or horizontally.
- Wall brackets for on-the-wall installation incl.

Pure Freude  
an Wasser




## 39 058 000 **RAPID SL 4 IN 1 SET FOR WC**

### **PRODUCT DESCRIPTION** (2/2)

- GROHE Fresh retrofit set, enables access to concealed cistern to add a cleaning tablet
- for chlorine-free tablets only
- including WC set for noise protection (37 131 000)
- for mounting of small flush plates please order revision shaft 40 911 000 (sold separately)

## 39 058 000 **RAPID SL 4 IN 1 SET FOR WC**

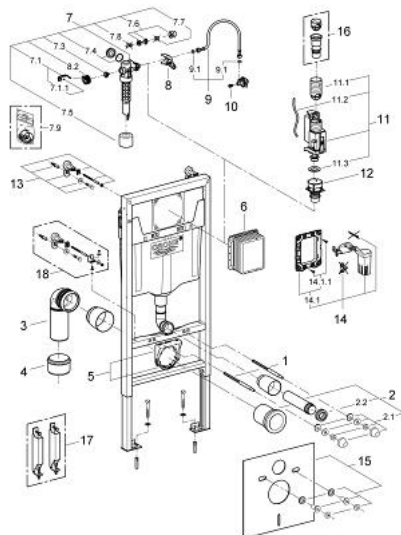

### **SPARE PARTS**, January 2013 – now

- 1: Threaded bolt (Spare part-nr. 4276400M)
- 2: WC inlet and outlet connecting set (Spare part-nr. 37311K00)
- 2.1: Basin fastening (Spare part-nr. 43511SH0)
- 2.2: Connector (Spare part-nr. 37119000)
- 3: PP-outlet bend Ø 90 mm (Spare part-nr. 42327000)
- 4: 4" outlet adaptor for Rapid SL (Spare part-nr. 42242000)
- 5: Support for outlet bend (Spare part-nr. 42243000)
- 6: Inspection shaft (Spare part-nr. 66791000)
- 7: Filling valve (Spare part-nr. 37095000)
- 7.1: Lever (Spare part-nr. 43734000)
- 7.1.1: Sealing washer (Spare part-nr. 4377000M)
- 7.2: Valve head (Spare part-nr. 43536000)
- 7.3: Membrane (Spare part-nr. 4375800M)
- 7.4: Screw cap (Spare part-nr. 43735000)
- 7.5: Valve FLOAT, 5 pcs.. (Spare part-nr. 4379100M)
- 7.6: Set of seals (Spare part-nr. 43722000)\*
- 8: Support device (Spare part-nr. 42246000)
- 9: Connecting hose (Spare part-nr. 42233000)
- 9.1: O-Ring (Spare part-nr. 0319100M)
- 10: Headpart (Spare part-nr. 42385000)
- 11: Dual Flush discharge valve AV1 (Spare part-nr. 42320000)
- 11.1: Extension for overflow pipe (Spare part-nr. 42313000)
- 11.2: Pneumatic hose (Spare part-nr. 42319000)
- 11.3: Sealing washer (Spare part-nr. 42310000)
- 12: Valve seat for GD2 (Spare part-nr. 42315000)
- 13: Front wall brackets (Spare part-nr. 3855800M)
- 14: Dual flush valve set (Spare part-nr. 38796000)
- 14.1: Frame (Spare part-nr. 42358000)
- 14.1.1: Screw (Spare part-nr. 6636200M)
- 15: Set for noise protection (Spare part-nr. 37131000)
- 16: 4.5 l adapter for GD2 (Spare part-nr. 42333000)\*
- 17: Accessory (Spare part-nr. 38779000)\*
- 18: Xtra wall brackets, flexible placing (Spare part-nr. 38733000)\*

\* Optional accessories